


Gooseneck Model

G.V.W.R	14,000#	HYDRAULIC LIFT	Self-Contained Electric/Hydraulic Scissor Lift
COUPLER	2 5/16" Bulldog Adjustable Gooseneck Coupler	HYDRAULIC PUMP	Front Mount Pump & Battery inside toolbox
AXLES	Tandem 7,000# Single Wheel	CONTROL	Magnetic Control Unit
SUSPENSION	Multi-leaf Slipper Spring with Equalizer	DUMP BED SIDES	19" high, 12 gauge smooth steel
BRAKES	Electric brakes on all axles	REAR GATE/DOOR	Combination Dump/Swing gate with Cam Latches
TIRE	ST235/80R16 (10 ply)	LOADING RAMPS	2 - 6 ft. Loading Ramps
WHEEL	16 x 6, 8-bolt Steel	LIGHTS	All LED Stop, Tail, Turn and Clearance
FRAME	10" I-Beam (12 lbs./ft.)	ELECTRIC PLUG	7-Way RV Style
GOOSENECK	10" I-Beam (12 lbs./ft.)	PREP	3-Step Acid Washed with Phosphorus Solution
CROSSMEMBERS	3" Channel on 16" centers	PRIMER	Rust Resistant Epoxy Primer
BED CROSSMEMBERS	3" Channel on 12" centers	PAINT	High Solid Urethane
BED LONG SILS	3" Channel	PINSTRIPES	Painted Pinstripes
SAFETY CHAINS	Heavy Duty with Safety Latch Hooks	WIDTH	96" wide (approx.)
JACK	Twin 12,000# Spring Loaded Drop Leg Jacks	FLOOR HEIGHT	Approx. 33"
BED TIE DOWNS	4 Heavy Duty D-Rings	WIRING	Front Mount in conduit
FLOOR	12 gauge smooth steel	REFLECTIVE TAPE	Required D.O.T. Reflective Taping
FENDERS	none	SAFETY	Emergency Breakaway switch & battery backup
TOOLBOX	Front Mount toolbox with lid between jacks		
DUMP ANGLE	45 degree Dump Angle (max)		All specifications subject to change without notice.

Measurements

Length	A	B	C
12	144	81	33"
14	168	102	33"
16	192	118	33"

All measurements are approximate

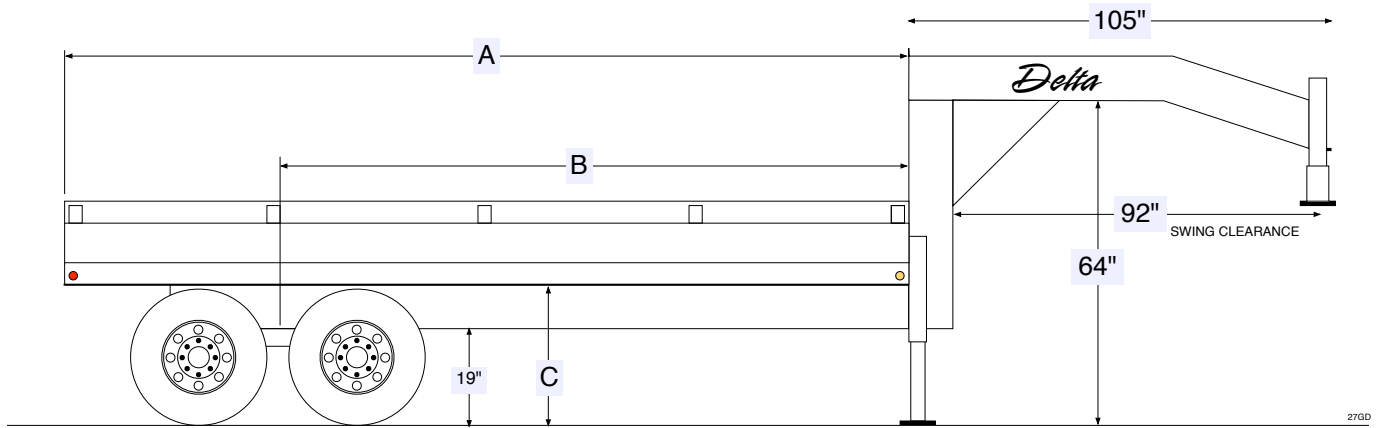

SUGGESTED RETAIL PRICE

Gooseneck

Model	Length	Capacities	MSRP
27GD-12	12'	5.6 cubic yards	\$9,861
27GD-14	14'	6.6 cubic yards	\$10,542
27GD-16	16'	7.5 cubic yards	\$11,003

27GD OPTIONS PRICING

2-Speed Jack System (trailer comes with 2 standard jacks)	\$191	Spare Wheel	\$85
Shrinkwrap Electrical Connections	\$86	Spare (Complete Tire & Wheel)	\$252
		3/16" Floor Upgrade (crossmembers on 12" OC)	\$739
		Debris Tarp	\$461